


### 256K Cache SRAM

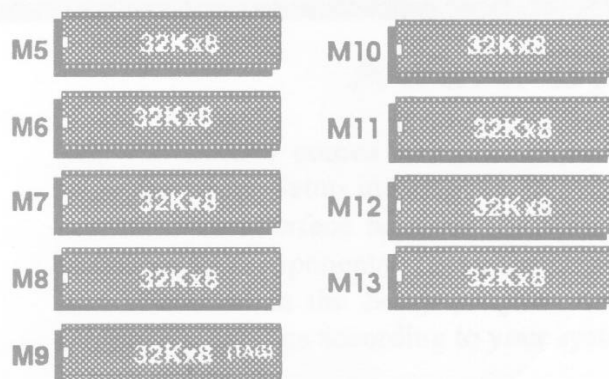

The cache size is jumper selectable. M5 - M9 are assigned as Bank 0 and M10 - M13 are assigned as Bank 1.

	64K	128K	256K
Bank 0	8K x 8	32K x 8	32K x 8
Bank 1	8K x 8	Empty	32K x 8
Tag RAM (M9)	8K x 8	8K x 8	32K x 8
JS1 (Jumper)	1-2	2-3	2-3
JS2 (Jumper)	2-3	1-2	2-3
JS3 (Jumper)	1-2	1-2	2-3

Table 3-2. Cache Configuration Size