

# KX-P3626 24-Pin Dot Matrix Printer




## Features:

- 300 cps maximum draft print speed
- 16.5" carriage allows for a wide variety of paper widths
- User-selectable push/pull tractor
- Rear, bottom, front & top feeds provide a wide variety of paper paths

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e   S p e c   S h e e t

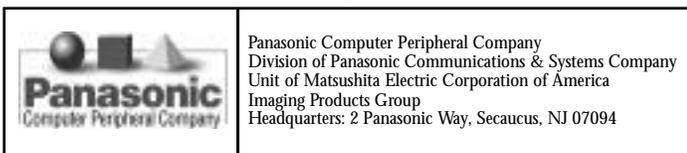

www.panasonic.com/alive

## KX-P3626 Specifications

Print Method	Impact Serial Dot Matrix		
Printhead and Life	24-pin (0.2mm wire diameter), 200 mil strokes; 100 mil chr (draft)		
Print Direction	Bidirectional (user selectable unidirectional) logic seeking		
Print Speed (char per sec)		Draft	LQ
	Micron	300 cps	100 cps
	Elite	240 cps	80 cps
	Pica	200 cps	66 cps
Internal Scalable Fonts	Courier, Prestige, Bold PS, Script, Sans Serif, Roman; From 8 to 96 point size.		
	Internal Bitmapped Fonts: Courier, Prestige, Bold PS, Script, Sans Serif, Orator, Roman, OCR-B, Super LQ		
Char. Matrix (H x V)	Draft 9x24; LQ 30x24; SLQ 30x48		
Printing Sizes	5,6, 7.5,8.5,10,12,15, 17, & 20 cpi & PS		
Characters Per Line	68, 81,102,116,136,163, 204, 233 & 272 cpl		
Lines Per Inch	1, 1.5,2,2.5,3,4,4.5,5,6, 7.5,8,9,10,12, n/60 n/180, n/360 & programmable lpi (n/72 & n/216 in IBM mode only)		
Character Sets	96 ASCII characters, 96 italic ASCII characters, 33 International characters, 14 language sets & legal, 33 Italic international characters 14 language sets & legal, 158 IBM special characters - sets, 1 & 2; 38 Multilingual characters		
Bit Image (matrix)	360x360 dots per inch		
EZ Set Operator Panel	16 Character LCD controls all printer functions		
Setup Disk	3.5" disk controls all printer functions. Includes a Command Reference program and a Windows 3.1 printer driver		
Line Feed Time	Approx. 90 msec (with 1/6 inch line feeding)		
Tractor Feed	User selectable push or pull, swivel mount, flat belt		
Paper Feed	Path:	Method:	
	Front	Friction Tractor (adjustable)	
	Rear	Push Tractor (adjustable)	
	Bottom	Pull Tractor (adjustable)	
	Top	Cut Sheet Feeder (optional)	
Paper Specifications	Continuous: 4.0 to 15.5 in., 18 to 24 lbs. (pull); 16 to 24 lbs.(push), Single Sheet: 4.0 to 16.5 in., 14 to 24 lbs., Envelopes: #6 & #10, Copies: Up to original + 4 non carbon copies, Thickness: Maximum thickness less than 0.013 in.		
Emulations*	Epson LQ-1170, IBM Proprinter XL24E		
Interface	Centronics parallel, RS-232C serial (optional)		
Buffer	40K (standard)		
Noise Level	46.5 dBA (std. mode), 43.5 dBA (super quiet mode)		
Environment	Operating: 50°F to 95°F; 30 to 80% humidity		
	Storage: - 4°F to 140°F; 10 to 90% humidity		
Reliability	6000 hrs MTBF @ 25% duty cycle		
Ribbon	Black seamless ribbon; 5 mil chr draft/rolling ASCII(KX-P170)		
Warranty	Limited 2 years - parts & labor See your dealer for details		
Dimensions & Weight	23.2 (w)x16.0 (d)x6.8 (h) inches; 33.7 lbs.		
Power Consumption	Standby 10W; Max 150W		
Options	Automatic Single Bin Cut Sheet Feeder (KX-P38) RS-232C with Current Loop Serial Interface (KX-PS13) RS-232C Non Current Loop Serial Interface (KX-PS14)		